ESSANI®
Lighting & Technology

CONECTOR FÊMEA CARRIL DE EMBUTIR 2PIN DYNAMIC SERIES

DYNAMIC SERIES RAIL FEMALE CONECTOR EMBEED 2 PIN

MODELO: EAFT.007.003-V1-F1

Importantes Informações de Segurança
Important Safety Informations

1. Durante a instalação e os trabalhos de manutenção, assim como durante as reparações, o sistema deve estar completamente isolado da rede elétrica.
2. Para a montagem deve utilizar unicamente o material de instalação ou acessórios autorizados.
3. Os danos resultantes de uma utilização errada não estão sujeitos a garantia.
4. No caso de um cabo exterior estar danifcado, poderá ser substituído unicamente pelo fabricante ou pelo serviço técnico.
5. Perde o direito de garantia em caso de modifcações arbitrárias (entre elas conta também qualquer modifcação nos cabos).
6. Guardar as instruções de montagem mesmo após ter realizado a montagem, para poder realizar posteriormente modifcações de forma correta.
1. During installation, maintenace and repairs the system must be completely disconnected from the mains eletricity supply.
2. Only use approved installation materials or system accessories for mounting.
3. Damage caused by incorrect connection will invalidate warranty entitlement.
4. To avoid hazards, any damaged external lead of the light must only be replaced by the manufacturer or its designated customer care representative.
5. No warranty cover if unauthorized modifcations are made.
6. Please keep these installaction instructions after installing the product so that any later changes can be carried out in the proper manner.

Especificação do Produto
Product Specificaation

TENSÃO DE FUNCIONAMENTO ***WORKING VOLTAGE***	**BAIXA TENSÃO** ***LOW VOLTAGE ONLY***
CORRENTE MAXIMA ***MAXIMUM CURRENT***	**5A**
TIPO DE CONECTOR ***TYPE OF CONNECTOR***	**M1**
TIPOLOGIA ***TYPOLOGY***	**2PIN**
TAMANHO **SIZE**	**7mmX20mmX16mm**
ACABAMENTO **SURFACE FINISH**	**PRETO** **BLACK**
TIPO DE CABO **CABLE TYPE**	**26G**
POTÊNCIA MÁX. **POWER MÁX.**	**60W**



Dimensões
Size



Todos os componentes utilizados nas instruções de instalação seguinte são adquiridos separadamente
All components used in the next instalation instrutions are purchase separately

DESIGNED IN PORTUGAL


ESSANI®
Lighting & Technology

CONECTOR FÊMEA CARRIL DE EMBUTIR 2PIN DYNAMIC SERIES

DYNAMIC SERIES RAIL FEMALE CONECTOR EMBEED 2 PIN

MODELO: EAFT.007.003-V1-F1

SISTEMA DYNAMIC CARRIL
DYNAMIC SYSTEM RAIL

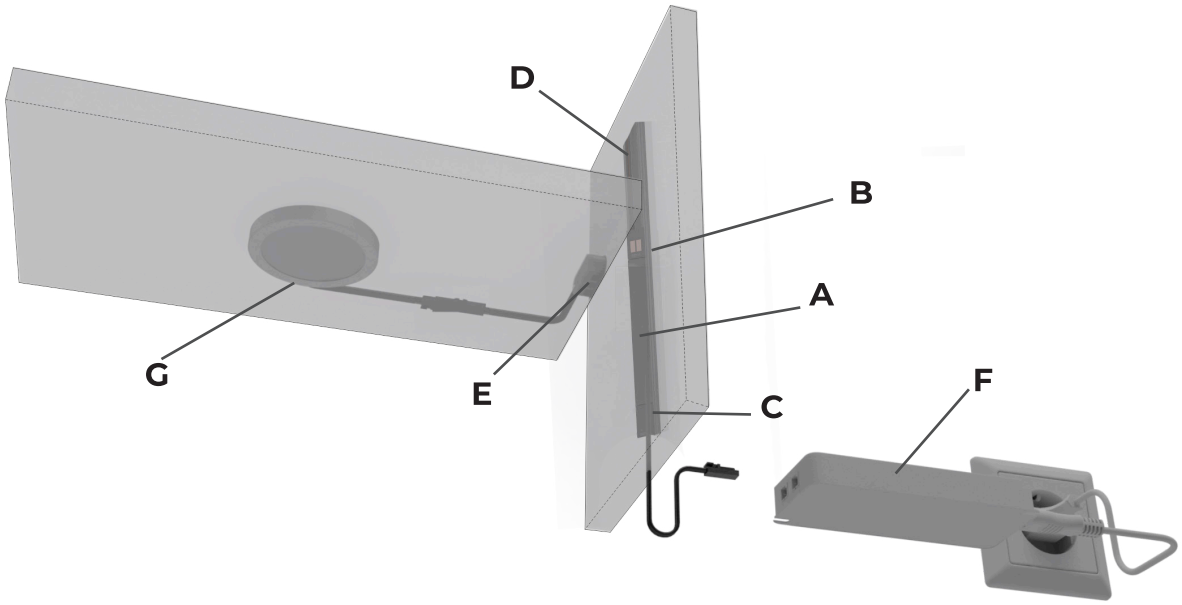

A-Tampa do carril/Rail cover

B-Conector fêmea/Female connector

C-Alimentador/ Feeder


D-Carril/ Rail


E-Conector macho/ Male connector

F-Transformador LED/LED driver


G-Luz LED/LED Light

Instruções de Instalação
Installation Instructions



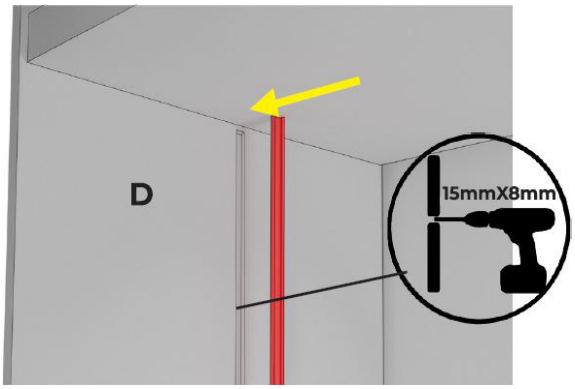

1 Embutir o carril (D) na ranhura
Embed rail (D) in the groove

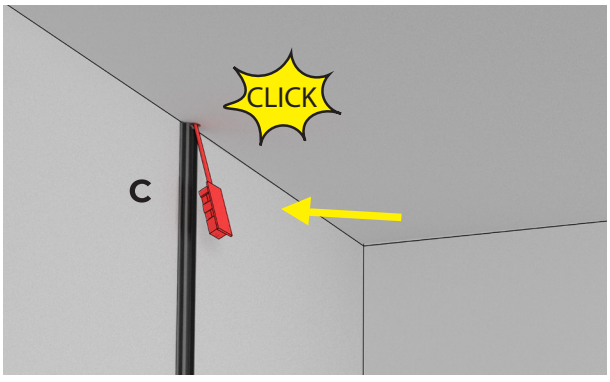

2 Encaixe o alimentador (C) no carril (D)
Fit the feeder (C) to the rail(D)

DESIGNED IN PORTUGAL


ESSANI®
Lighting & Technology

CONECTOR FÊMEA CARRIL DE EMBUTIR 2PIN DYNAMIC SERIES


DYNAMIC SERIES RAIL FEMALE CONECTOR EMBEED 2 PIN

MODELO: EAFT.007.003-V1-F1


SISTEMA DYNAMIC CARRIL
DYNAMIC SYSTEM RAIL

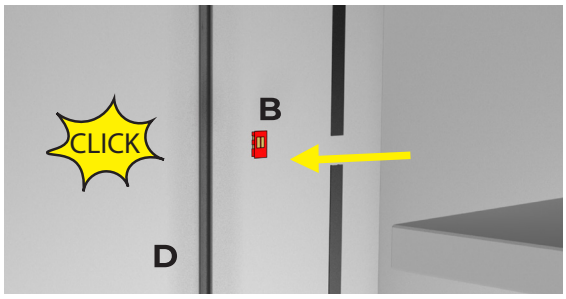


3 Encaixar o(s) connector(es) Fêmea (B) no carril (D) na posição desejada
Fit the connector(s) Female (B) on rail (D) in the desired position

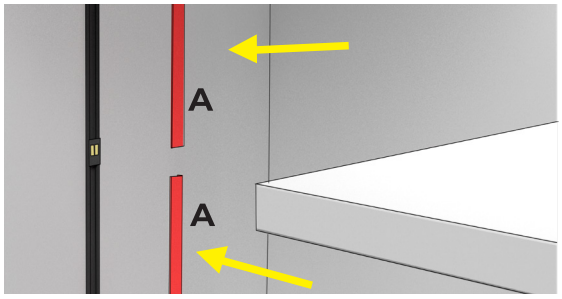


4 Colocar a tampa do carril (A) nos espaços sem conector
Place the rail cover (A) in the spaces without connector

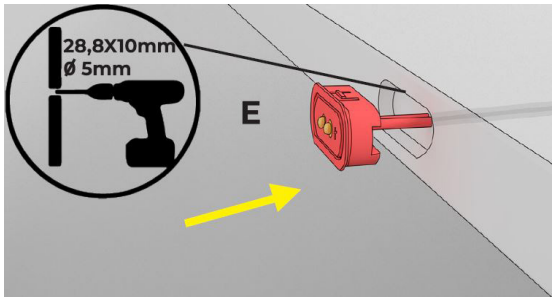

5 Encaixar o Conector Macho (E) no furo da prateleira que pretende eletrificar
Fit the Male Connector (E) in the shelf hole that intend to electrify

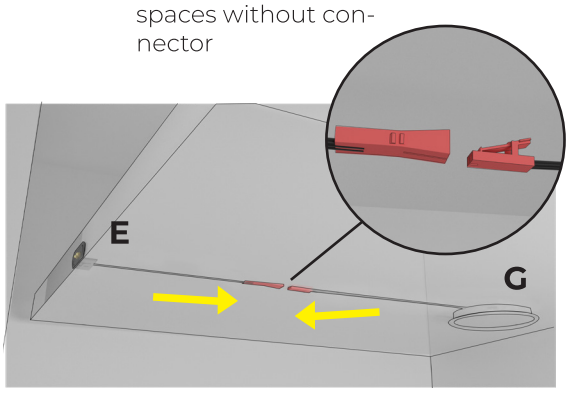

6 **Conecte o conector macho (E) com o ponto de iluminação Led. (G)**
Connect the male connector (E) with the led lightning. (G)

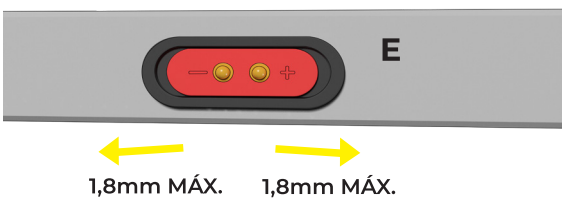

7 Ajuste a posição do conector Macho (B) para um maior contacto
Adjusting the position of the Male connector (B) for greater contact



8 Coloque a prateleira no suporte, unindo o conector Fêmea(B) ao conector Macho (E)
Place the shelf on the bracket, joining the Female connector (B) to the Male connector (A)

DESIGNED IN PORTUGAL